




Low Cost Electronic Thermostat with Ground Fault Equipment Protection

MODEL SST-1A & SST-2 FREEZE PROTECTION THERMOSTAT

DATA SHEET

FEATURES & BENEFITS

- Automatic freeze protection
- 40°F (4.4°C) set point
- Automatic supply voltage selection
- Two-pole conactor switches up to 30 AMP heater loads
- Alarm relay with isolated contact (SST-2 ONLY)
- Integral 30 mA GFEP
- C-UL-US listed
- Simple to install and operate
- Minimum energy costs

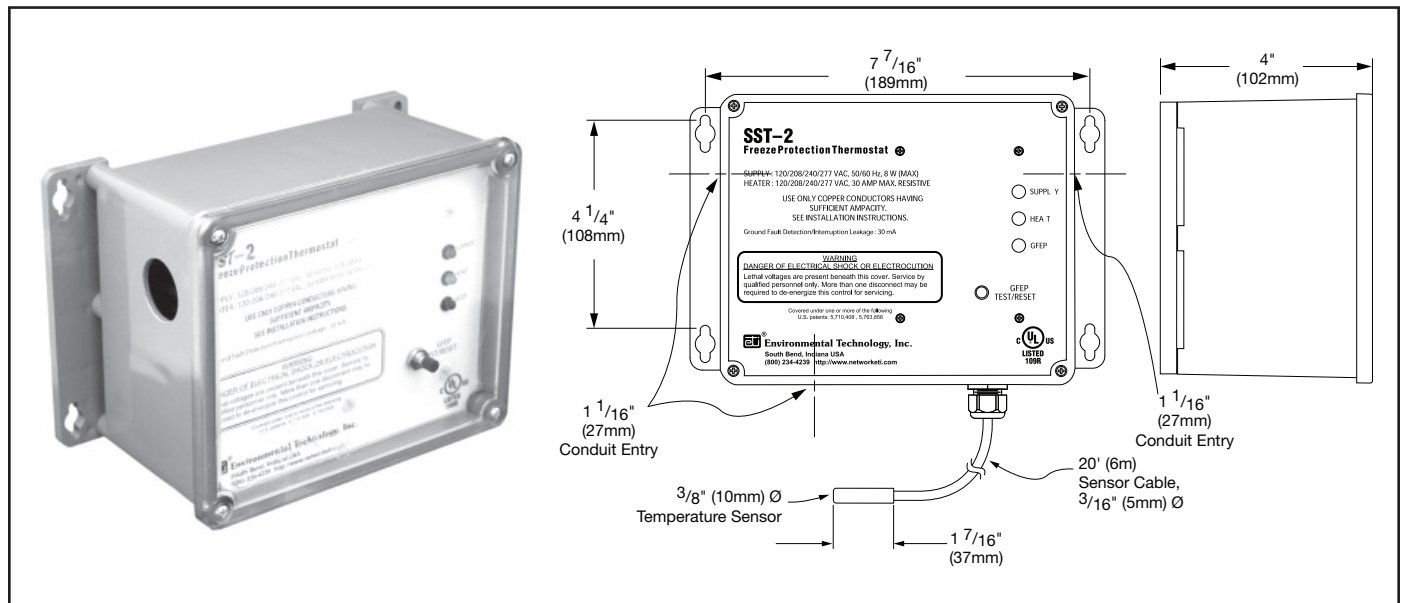

DESCRIPTION

The C-UL-US listed SST-1A and SST-2 Freeze Protection Thermostats replace electromechanical thermostats in cost-sensitive applications requiring ground fault equipment protection (GFEP). The SST-1A and SST-2 are listed by Underwriters Laboratories to Standard UL 873 for Temperature-Indicating and -Regulating Equipment.

The SST-1A and SST-2 operate heaters at temperatures below 40°F (4.4°C) and turns them off above 42°F (5.5°C). The external temperature sensor (supplied) is a NEC Class 2 device rate for wet locations.

The SST-1A and SST-2 feature a built-in 30 mA GFEP that is digitally

filtered to minimize false tripping. A ground fault must be manually reset with the TEST/RESET switch before heater operation can be resumed. The GFEP function is automatically tested along with the heaters whenever power is applied and once every 24 hours thereafter for additional safety.

The SST-2 includes an alarm relay with an isolated SPDT 1 AMP contact. The alarm relay is reverse acting and is normally closed unless there is a ground fault condition, GFEP circuitry fails a test, or when there is a bad temperature sensor.

The SST-1A and SST-2 Freeze Protection Thermostats operate from

automatically selected operating voltages of 120, 208, 240 or 277 volts, single-phase. They control heater loads of up to 30 amps while consuming less than 2 watts when idling. The temperature sensor is an NEC Class 2 device that can be located up to 2,000' (610 m) away from the SST. They operate in non-hazardous environments in a temperature range extending from -40° to 131°F (-40° to 55°C). The rugged non-metallic enclosure is appropriate for installation in indoor or outdoor locations suitable for NEMA 4x applications.

SPECIFICATIONS

General

Area of use	Nonhazardous locations
Approvals	 Type 873 Temperature Regulating Equipment

Enclosure

Protection	NEMA 4x
Cover attachment	Polycarbonate cover, machine screws
Entries	1 × 3/4" entry (bottom right) for NEC Class 2 connections 3 × 1-1/16" entries (bottom left and left) for supply and load power
Material	Polycarbonate
Mounting	Wall mounted

Front Panel Interface

Status indicator	SUPPLY (green) power applied SUPPLY (green, flashing) bad thermistor HEAT (yellow) call for heat GFEP (red) ground fault condition GFEP (red, flashing) failed GFEP test GFEP (red, flashing, rapid) GFEP test in progress
------------------	---

Remote Interface

Alarm relay	Isolated SPDT 1 AMP Class 2 contact
Summary alarms	No Power Ground Fault Condition GFEP function test failure Bad or missing Thermistor

Control

Supply voltage	120, 208, 240 or 277 volts, single phase (automatically selected)
Contact type	Two Form A DPST
Maximum Ratings	Voltage: 277 VAC Current: 30 amps

Temperature Sensor

Set point	40°F (4.4°C)
Dead band	2°F (1°C)
Sensor type	Thermistor network
Circuit type	NEC Class 2
Lead Length	Up to 2,000' (610m) using 12 AWG 2-wire jacketed cable Up to 500' (152m) using 18 AWG 2-wire jacketed cable


Environmental

Operating temperature	-40°F to 130°F (-40°C to 55°C)
Storage temperature	-67°F to 167°F (-55°C to 75°C)

Ground Fault Equipment Protection (GFEP)

Set point	30 mA
Automatic self test	Mode A: Verifies GFEP function before contactors operate Mode B: Verifies GFEP function every 24 hours
Manual test/reset	TEST/RESET switch of front panel

INSTALLATION

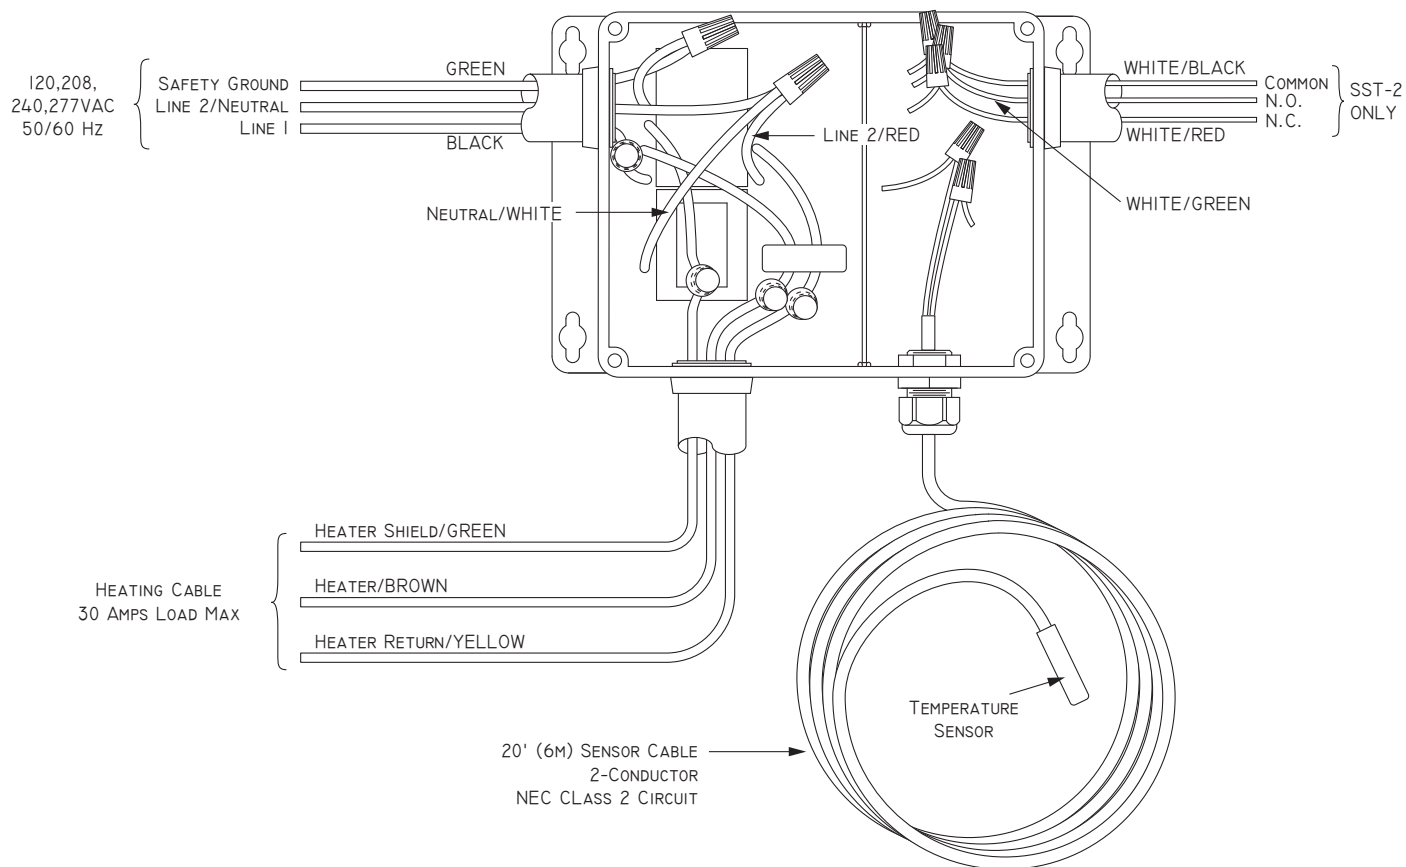

ORDERING INFORMATION

Order Number	Description
22743	Model SST-1A Freeze Protection Thermostat
22744	Model SST-2 Freeze Protection Thermostat
19272	Temperature Sensor (included)

LIMITED WARRANTY

ETI's two year limited warranty covering defects in workmanship and materials applies. Contact Customer Service for complete warranty information.

DISCLAIMER

Environmental Technology, Inc. makes no representations or warranties, either expressed or implied, with respect to the contents of this publication or the products that it describes, and **specifically disclaims any implied warranties of merchantability or fitness for any particular purpose.** Environmental Technology, Inc. reserves the right to revise this publication, and to make changes and improvements to the products described in this publication, without the obligation of Environmental Technology, Inc. to notify any person or organization of such revisions, changes or improvements.

The ETI logo, Snow Switch, Floorstat, Tracon, We Manage Heat, APS, RCU, CIT, GIT, SIT are registered trademarks of Environmental Technology, Inc. Copyright © 2006 Environmental Technology, Inc. All rights reserved.