


# NEXANS ELECTRIC FLOOR **WARMING** SELECTION GUIDE

## Series TXLP/2R Twin Conductor Cable

### 5 EASY Steps to Warm Floors

#### Measure

- 100 total sq. ft.
- 4 toilet
- 14 vanity
- 18 tub
- =64 OPEN sq. ft.

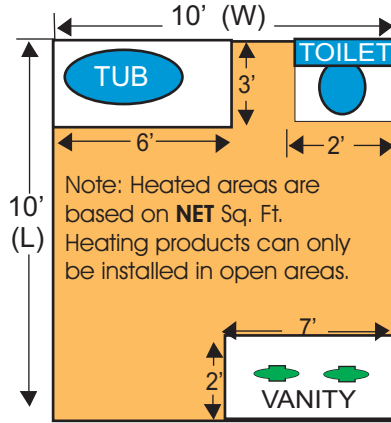

### 120 VOLT TXLP/2R FLOOR WARMING CABLES

MODEL NUMBER	NET Sq. Ft.
TXLP/2-200/17-120	14-20
TXLP/2-300/17-120	21-30
TXLP/2-400/17-120	31-40
TXLP/2-500/17-120	41-50
TXLP/2-600/17-120	51-60
TXLP/2-700/17-120	61-70
TXLP/2-850/17-120	71-85

### 120 VOLT TXLP/2R CABLE TECHNICAL DATA

MODEL NUMBER	LENGTH	WATTS	OHMS	AMPS
TXLP/2-200/17-120	40	200	72	1.7
TXLP/2-300/17-120	58	300	48	2.5
TXLP/2-400/17-120	77	400	36	3.4
TXLP/2-500/17-120	96	500	28.8	4.2
TXLP/2-600/17-120	116	600	24	5
TXLP/2-700/17-120	135	700	19.7	5.9
TXLP/2-850/17-120	164	850	16.9	7.1

#### Confirm Electrical Supply

Is electric supply  
120 Volt ? or 230 Volt ?

#### Verify Available Floor Height

Will floor take minimum  
5/8" Mortar bed?

#### Select Product

Go to the **SELECTION GUIDE**  
on the right and choose  
the required product.

#### Place Order

Phone: 800-522-3986  
Fax: 215-257-7399  
e-mail: sales@OrbitMfg.com  
Website: www.OrbitMfg.com

### Technical Support

**FREE** consultation and quotation services on projects.  
**LIVE**, on-the-job phone support from our technical  
service experts. **TOLL - FREE** customer consultation.

### 230 VOLT TXLP/2R FLOOR WARMING CABLES

MODEL NUMBER	NET Sq. Ft.
TXLP/2-300/17	20-30
TXLP/2-400/17	31-40
TXLP/2-500/17	41-50
TXLP/2-600/17	51-60
TXLP/2-700/17	61-70
TXLP/2-840/17	71-85
TXLP/2-1000/17	86-100
TXLP/2-1250/17	101-125
TXLP/2-1370/17	126-137
TXLP/2-1700/17	138-170
TXLP/2-2100/17	171-210
TXLP/2-2600/17	211-260
TXLP/2-3300/17	261-330

### 230 VOLT TXLP/2R CABLE TECHNICAL DATA

MODEL NUMBER	LENGTH	WATTS	OHMS	AMPS
TXLP/2-300/17	58	300	176.3	1.3
TXLP/2-400/17	77	400	132.3	1.7
TXLP/2-500/17	96	500	105.8	2.2
TXLP/2-600/17	115	600	88.2	2.6
TXLP/2-700/17	135	700	75.6	3
TXLP/2-840/17	163	840	63	3.6
TXLP/2-1000/17	191	1000	52.9	4.4
TXLP/2-1250/17	238	1250	42.3	5.4
TXLP/2-1370/17	265	1370	38.6	6
TXLP/2-1700/17	328	1700	31.1	7.4
TXLP/2-2100/17	406	2100	25.2	9.1
TXLP/2-2600/17	507	2600	20.3	11.3
TXLP/2-3300/17	636	3300	16	14.3